



UTAS[®] DEFENSE

www.utasarms.com



UTS-15

PUMP ACTION SHOTGUN

UTS-15 Black

UTS-15 pump action shotgun, Black cerakote coating, 12 ga., 14+1 round capacity.

NOTE: *Cylinder & 7,5" chokes & sights sold separately; not included in purchase price.

TECHNICAL DETAILS

Caliber	• 12 GAUGE
Muzzle Thread	• 20.5x1
Capacity	• 14+1 ROUND
Design	• Bullpup Design
Barrel Length	• 49.8 cm
Chambered For	• 2 1/2", 2 3/4" & 3" Magnum Ammunition
Product Weight	• 6.9 lbs (3.6 Kg)
Length	• 28.3" (72.5 cm)
Case	• Canvas Case
Manufacturer	• Utas Defense





XTR-12 Black


XTR-12 semi auto shotgun, Black coating, 12 ga., 2,5,10 round capacity.

NOTE: *Sights sold separately; not included in purchase price.

TECHNICAL DETAILS

Caliber	• 12 GAUGE
Action	• Semi Auto
Muzzle Thread	• 23x1
Magazine Capacity	• 2 - 5 - 10 rounds (std XTR-12 comes with 5 rounds)
Operation System	• Gas Operated / Rotating bold
Feed System	• Detachable Magazine
Barrel Length	• 51 cm (20.08")
Chambered For	• 2 1/2", 2 3/4" & 3" Magnum Ammunition
Product Weight	• 6.9 lbs (3.8 Kg)
Length	• 998 mm (min) 1077 mm (max)
Stock	• Telescopic Stock (five position)
Case	• Canvas Case
Manufacturer	• Utas Defense



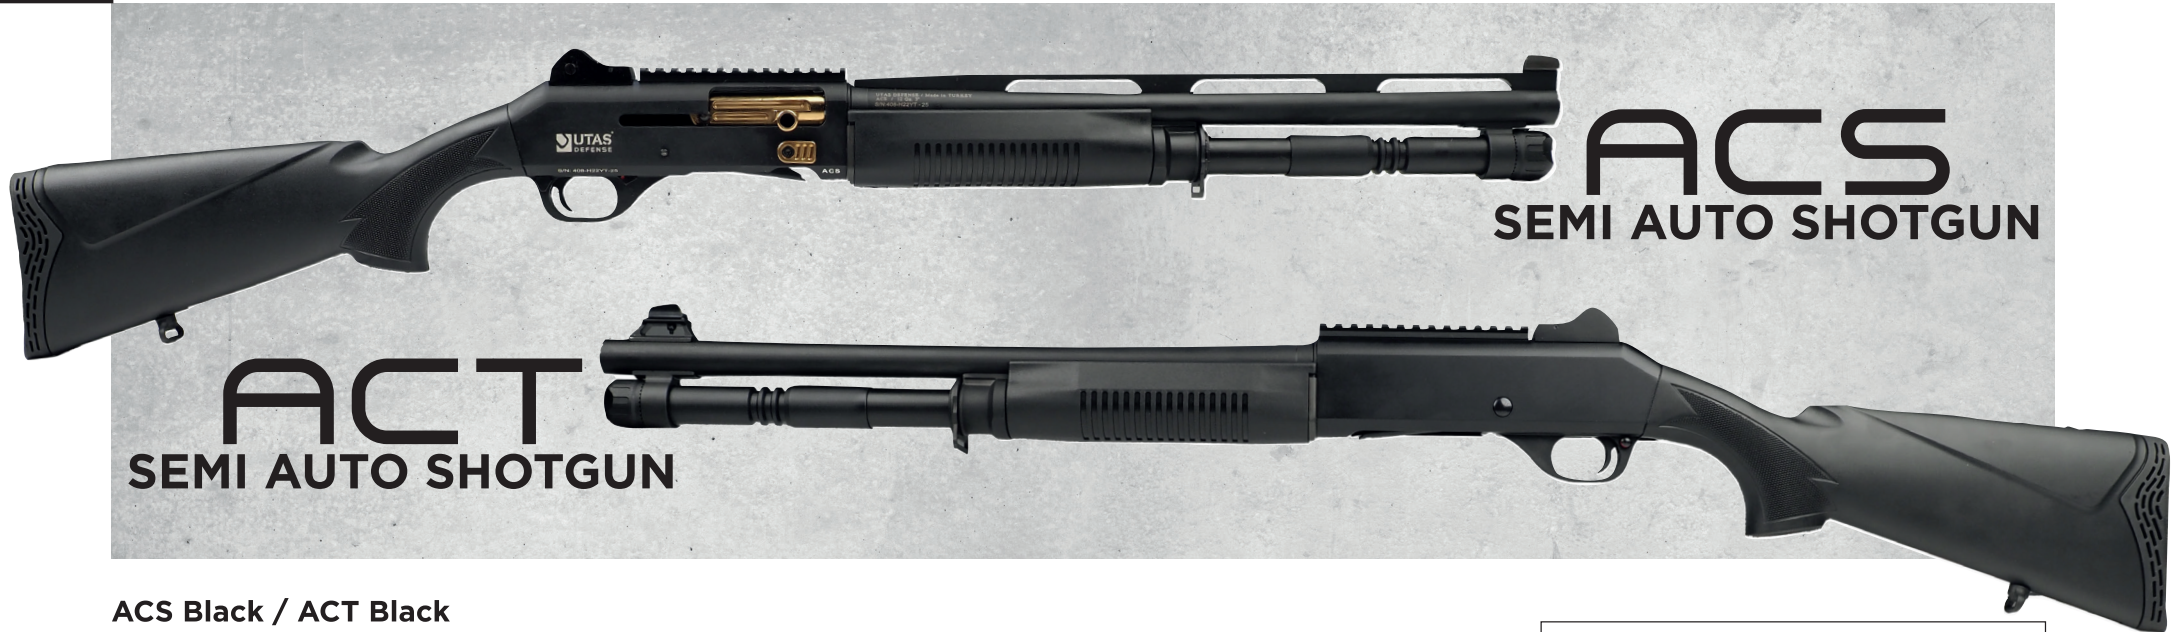

ACS Black / ACT Black

Integrated picatinny rail for iron sights or optics.

4140 steel bolt body, precision machined and heat treated 4140 steel rotary bolt head.

Precision machined and heat treated 4140 barrel extension.

Precision machined 4140 steel barrel with muzzle threaded to accept multi chokes 1-3-5 No.

Field stripping in 60 seconds, no tools required.

TECHNICAL DETAILS

Chambered For	• Semi Auto 12 - gauge shotgun chambered for 2 3/4" - 3" magnum ammunition
Magazine Capacity	• 5+1 round
Operation System	• Gas Operated Piston System/Rotating bolt
Material Receiver	• Aluminum 7012
Barrel Length	• 470 mm (18,50")
Overall Length	• 1030 mm
Weight	• ACS /3720 gr ACT /3600 gr
Stock	• Fixed Stock
Finish	• Anodizing



ACS



ACT



UTP-6

PUMP ACTION SHOTGUN

XTP-6 Black

Integrated Quad picatinny rail for iron sights or optics.

4140 steel bolt body.

Precision machined and heat treated 4140 barrel extension.

Precision machined 4140 steel barrel.

Field stripping in 15 seconds, no tools required.



TECHNICAL DETAILS

Chambered For	• Pump Action 12 - gauge shotgun chambered for 2 3/4" - 3" magnum ammunition
Magazine Capacity	• 5+1 round
Operation System	• Pump action
Material Receiver	• Aluminum 7012
Barrel Length	• 470 mm (18,50")
Overall Length	• 1010 mm
Weight	• 3600 gr
Stock	• Fixed Stock
Finish	• Anodizing



.223 REM SEMI AUTO RIFLE

TECHNICAL DETAILS

Barrel Length	7,5" / 10,5" / 12" / 14,5" / 16"
Barrel Twist	1:7
Caliber	.223 REM
Overall Length (min/max)	63.87 cm / 71.47 cm (with 7,5" barrel)
Weight (w/o optics)	2.5 kg (with 7,5" barrel)
Stock Type	Adjustable, with 7 positions
Handguard	Free floating KeyMod with MIL-STD M1913 Picatinny Accessory Single Rail STD (Quad Rail Optional)
Height Without Magazine	19 cm
Width	6 cm
Operation	Gas-operated, rotating bolt (direct impingement)

Forward Assist	Yes
Trigger Pull Weight	3.5 - 4.5 kg
Fire Selector	Safe, Semi-Automatic
Sling Attachment Points	QD on both sides of the stock
Standard Magazine Capacity	30 Rounds (10 Rounds Optional)
Muzzle Velocity	750 m/s
Rate of Fire	Approximately 800-1000 RPM
Barrel Life	10 000 rounds minimum (QPQ coated barrel)
Parts Life	10 000 rounds minimum
Other	Stainless steel small parts, improved low mass bolt, long-life springs
Silencer	Optional



.223 REM STRAIGHT PULL RIFLES

TECHNICAL DETAILS

Barrel Length	• 7,5" / 10,5" / 12" / 14,5" / 16"	Forward Assist	• Yes
Barrel Twist	• 1:7	Trigger Pull Weight	• 3.5 kg – 4.5 kg
Caliber	• .223 REM	Fire Selector	• Safe, Fire
Overall Length (min/max)	• 63.87 cm / 71.47 cm (with 7,5" barrel)	Sling Attachment Points	• QD on both sides of the stock
Weight (w/o optics)	• 2.5 kg (with 7,5" barrel)	Standard Magazine Capacity	• 30 Rounds (10 Rounds Optional)
Stock Type	• Adjustable, with 7 positions	Muzzle Velocity	• 750 m/s
Handguard	• Free floating KeyMod with MIL-STD M1913 Picatinny Accessory Single Rail STD (Quad Rail Optional)	Barrel Life	• 10 000 rounds minimum (Chromed barrel)
Height Without Magazine	• 19 cm	Parts Life	• 10 000 rounds minimum
Width	• 6 cm	Other	• Stainless steel small parts, improved low mass bolt, long-life springs
Operation	• Straight Pull	Silencer	• Optional



TECHNICAL DETAILS

Barrel Length	• 6", 8", 12"
Barrel Twist	• 1:10
Caliber	• 9x19 mm
Overall Length (min/max)	• 57,5 cm / 65 cm with 6" barrel
Weight (w/o optics)	• 2,65 kg (6" barrel)
Stock Type	• Adjustable, with 7 positions
Handguard	• Free floating KeyMod with MIL-STD M1913 Picatinny Accessory Single Rail STD (Quad Rail Optional)
Height Without Magazine	• 19 cm
Width	• 6 cm
Operation	• Blowback, Closed bolt
Forward Assist	• No
Trigger Pull Weight	• 3.5 - 4.5 kg

Fire Selector	• Safe, Semi-Automatic
Sling Attachment Points	• QD on both sides of the stock
Standard Magazine Capacity	• Glock Magazine 33 rounds (10 rounds optional)
Muzzle Velocity	• 400 m/s
Rate of Fire	• Approximately 900 RPM
Barrel Life	• 10 000 rounds minimum (QPQ coated barrel)
Parts Life	• 10 000 rounds minimum
Other	• Stainless steel small parts, improved low mass bolt, long-life springs
Silencer	• Optional



UT9-M MINI

9 MM SEMI AUTO PISTOL

TECHNICAL DETAILS

Barrel Length
Barrel Twist
Caliber
Overall Length (min/max)
Weight (w/o optics)

Stock Type
Handguard
Height Without Magazine
Width
Operation
Forward Assis
Trigger Pull Weight
Fire Selector
Standard Magazine Capacity

6" (152 mm)
1:10
9x19 mm
370 mm / 570 mm
2 kg (w/o folding stock)
2,4 kg (with folding stock)
Folding Stock
Monoblock body
200 mm
65 mm
Blowback, Closed bolt
No
3.0 kg
Safe, Semi-Automatic,
33 Rounds
(10 Rounds Optional)

Magazine Weight
Muzzle Velocity
Rate of Fire
Barrel Life

Parts Life
Other

Silencer

33 Rounds 127 gr.
400 m/s
Approximately 900 RPM
10 000 rounds minimum
(QPQ coated barrel)
10 000 rounds minimum
Stainless steel small parts,
improved low mass bolt,
long-life springs
Optional



.308 WIN SEMI AUTO RIFLE

TECHNICAL DETAILS

Barrel Length	• 16", 18", 20"	Fire Selector	• Safe, Semi-Automatic
Barrel Twist	• 1:10	Sling Attachment Points	• QD on both sides of the stock
Caliber	• .308 WIN	Standard Magazine Capacity	• 20 rounds magazine
Overall Length (min/max)	• 91 cm / 98 cm (min/max) 16" barrel	Muzzle Velocity	• 830 m/s
Weight (w/o optics)	• 3.5 kg (16" barrel)	Rate of Fire	• Approximately 800-1000 RPM
Stock Type	• Adjustable, with 7 positions	Barrel Life	• 10 000 rounds minimum (QPQ coated barrel)
Handguard	• Free floating KeyMod with MIL-STD M1913 Picatinny Accessory Single Rail STD (Quad Rail Optional)	Parts Life	• 10 000 rounds minimum
Height Without Magazine	• 19 cm	Other	• Stainless steel small parts, improved low mass bolt, long-life springs
Width	• 7 cm	Silencer	• Optional
Operation	• Gas-operated, rotating bolt (direct impingement)		
Forward Assist	• Yes		
Trigger Pull Weight	• 3.5 - 4.5 kg		



.308 WIN STRAIGHT PULL RIFLE

TECHNICAL DETAILS

Barrel Length	• 16", 18", 20"
Barrel Twist	• 1:10
Caliber	• .308 WIN
Overall Length (min/max)	• 91 cm / 98 cm (min/max) 16" barrel
Weight (w/o optics)	• 3.5 kg (16" barrel)
Stock Type	• Adjustable, with 7 positions
Handguard	• Free floating KeyMod with MIL-STD M1913 Picatinny Accessory Single Rail STD (Quad Rail Optional)
Height Without Magazine	• 19 cm
Width	• 7 cm
Operation	• Straight Pull System
Forward Assist	• Yes
Trigger Pull Weight	• 3.5 kg - 4.5 kg
Fire Selector	• Safe, Fire
Sling Attachment Points	• QD on both sides of the stock
Standard Magazine Capacity	• 20 rounds magazine

Muzzle Velocity	• 830 m/s
Rate of Fire	• Approximately 800-1000 RPM
Barrel Life	• 10 000 rounds minimum (QPQ coated barrel)
Parts Life	• 10 000 rounds minimum
Other	• Stainless steel small parts, improved low mass bolt, long-life springs
Silencer	• Optional

UTAS[®]

DEFENSE



www.utasarms.com

Utas Savunma Sanayi ve Ticaret A.Ş.

Antalya Organize Sanayi Bölgesi 2. Kısım 26. Cad. No:1 Döşemaltı 07190 Antalya / TURKEY

Tel: +90 242 323 37 37 **Fax:** +90 242 323 66 76

info@utastr.com